

ST050-250CF

PowerKeeper Modular C&I Energy Storage System



Flexible & Scalable

- 12.5 kWh pack-based design supports flexible configuration up to 250 kWh per system
- Optional long-duration combiner box supports 2–4 clusters, expandable to 1000 kWh & 8h
- Standardized design simplifies warehousing and distribution



Fast Deployment

- Pre-assembled design with simplified wiring reduces installation time
- Suitable for both new and retrofit projects, with rapid site deployment
- Supports mixed new & aged modules with active balancing



Safety & Reliable


- Pack-level thermal runaway protection, smoke detection and explosion relief valve
- IP66 & C5-M protection, enhanced flood resistance, withstanding 50 cm submersion for 24 hours
- Seamless off-grid transfer $\leq 10\text{ms}$ ensures load continuity



Smart O&M

- User-friendly monitoring via logger with cloud-based AI optimization
- OTA upgrades and predictive diagnostics reduce maintenance costs
- Smooth integration with legacy EMS and existing meter

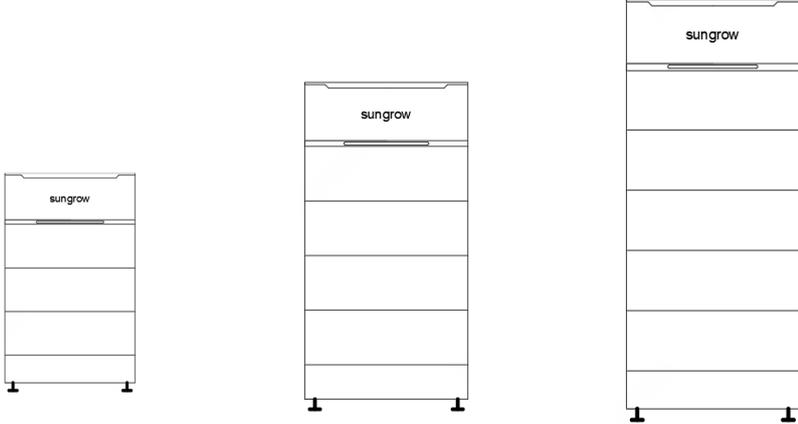

Product Name		ST050-250CF	
Battery Stack		STC12.5	
Cell type	LFP 3.2 V		
Nominal capacity	12.48 kWh		
Depth of discharge (DOD)	0 % - 100 %		
Nominal voltage range	32.4 V ~ 43.8 V		
Nominal charge / discharge rate	0.5 P		
Weight (per stack)	≤ 90 kg		
Dimensions (W * H * D)	800 mm * 270 mm * 405 mm		
System Specifications			
Auxiliary power supply	Internal power supply		
Installation method	Floor-standing		
Noise level	≤ 60 dB (A) @ 1 m, 25 °C		
Operation temperature range	-20 °C ~ 55 °C		
Storage temperature range	-30 °C ~ 55 °C		
Operation humidity range	0% ~ 100 % RH, non-condensing		
Max. operation altitude	3000 m		
Degree of protection	IP66		
Anti-corrosion degree	C5-M		
Temperature control method	Forced air cooling		
Compliance & Safety			
Standard compliance	IEC / EN 62619, IEC / EN 63056, UN 38.3; IEC / EN62477-1, IEC / EN 62040, IEC / EN 61000-6-1 / 6-3; VDE 2510-50; IEC / EN 62933-5-2, UL 9540A		
Fire suppression system	Aerosol, smoke sensor and explosion relief valve		
EMC class	Class B		
Base configuration options			
			
Number of packs	3 PCS (*)	4 PCS	5 PCS
Stack capacity (*)	37.4 kWh	49.9 kWh	62.4 kWh
Stack weight	340 kg	430 kg	520 kg
Stack demension (W * H * D)	800 mm * 1297 mm * 405 mm	800 mm * 1567 mm * 405 mm	800 mm * 1837 mm * 405 mm
Typical system configurations			
ST050CF 49.9kWh		*1	
ST062CF 62.4kWh			*1
ST075CF 74.9kWh	*2		
ST100CF 99.8kWh		*2	
ST150CF 149.8kWh		*3	
ST200CF 199.7kWh		*4	
ST250CF 249.6kWh			*4

1. A single 3-pack stack cannot operate independently, the minimum system capacity is 49.9 kWh

2. The optional long-duration combiner box supports 2-4 clusters in parallel, expandable up to 1000 kWh & 8h

3. Optional heating element available for cold regions

4. "1+X stack (50kWh)" consists of four pre-assembled battery packs for integrated delivery and installation, see user manual for details

5. Specifications are subject to change without notice. Final product specifications shall prevail

